

i66 Face Recognition Door Phone

Description

The i66 face recognition door phone is equipped with a 4-inch IPS color screen and incorporates high-precision face recognition technology. It features anti-spoofing liveness detection for images, videos, and masks, maximizing community security. Additionally, it supports audio and video communication with IP phones, indoor stations, or via a mobile app. With multiple door opening methods, it is widely applicable in community, apartment, and office building scenarios.

Main Features



- 4-inch IPS color screen with clear and intuitive interface
- Equipped with the latest face recognition technology and anti-spoofing algorithms, ensuring community security
- Independently developed voice intelligent noise reduction algorithm ensures clearer audio and video calls
- Aluminum alloy casing design, showcasing high-end quality
- Supports the standard ONVIF protocol, providing high flexibility and excellent compatibility
- IP66/IK07 high protection rating, enhancing the lifespan and stability of the product

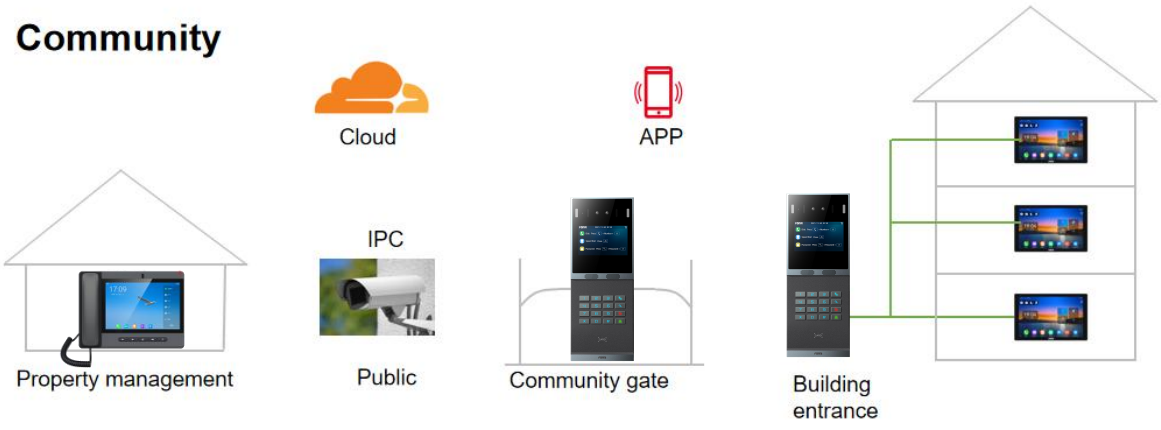

Fanvil Technology Co., LTD
Add: 13th Floor, Building 2, Runzhi R&D Center, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Phone: 0755-26402199 E-mail: sales@fanvil.com URL: www.fanvil.com.cn

Specifications

Panel Type	Multi-apartment，Community，Hotel
Screen/Keyboard	4-inch 800×480 Color Screen 12 Numeric Keys+4 Function Keys
Body	Aluminum
Colors	Gunmetal
Sensor	1/2.8-inch
Camera	2 Mpx ×2 (Automatic lighting)
Viewing Angle	62°(Horizontal) 37.4°(Vertical)
Output video	H.264 (Baseline,Main Profile)
Light Sensitivity	0.1Lux
Card Storage	1,0000
Face Storage	1,0000
Power Consumption	PoE: 7.7~19.8W Adapter: 6.3~18.5W
Power Supply	DC 12V / 2A (If not using POE+) POE 802.3at Class 4
Working Temperature	-40℃~+60℃
Storage temperature	-40℃~+70℃
Size of the Panel	300×115.6×33.2mm
IP / IK Level	IP66 / IK07
Installation	Wall-mounted Flush-mounted(Need to Purchase Accessories Separately：EX103)

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	Face Recognition，IC/ID Card，PIN Code QR Code，By DTMF Code，Remote door opening
Interface	Wiegand Input/Output Short Circuit Input/Output RS485 (Reserve)
Supported Wiegand	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	Mifare Classic 1K/4K，Mifare DESFire，Mifare Ultralight，Mifare Plus Cards 13.56 MHz，Cards 125 kHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay，Open API，Motion detection，Tamper Alarm (gravity sensing)，Smart noise reduction

Fanvil Technology Co., LTD
Add: 13th Floor, Building 2, Runzhi R&D Center, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Phone：0755-26402199 E-mail：sales@fanvil.com URL：www.fanvil.com.cn