WIRELESS CONFERENCE SYSTEM (CENTRAL UNIT)

Z-TS500-AS

DESCRIPTION

The Z-TS500-AS is a Conference System Controller for the wireless professional digital conference system which is combine digital technology and high-frequency transmission technology into the conference system. The system can be independently detect the system and has multiple speaking mode. It has flexibility of system installation and seamless connection with intelligent central control systems and providing a more complete solution efficient conference system.

SPECIFICATIONS

Power Source	100 – 240 V AC, 50/60 Hz (use of the supplied AC adapter)
Power Consumption	20 W
Input	Line In: 5 kΩ, unbalanced, RCA Jack
Output	Out 1: balanced, XLR-M connector Out 2: unbalanced, ø6.3 mm Phone Jack Line Out 1 – 3: unbalanced, RCA Jack
Display	HD 3.5 inch IPS TFT
Audio Signal Receiving Interface	BNC Jacks x2
Data Signal Interface	TNC Jack
Computer Connecting	USB-B (female)
Recording Port	USB-A (female)
Recording Function	Recording can be made to a USB memory device Recording format: MP3 (MPEG-1 Audio Layer-3)
Audio Channel Number Channel Carrier Frequency Band Modulation Methode Receiving Sensitivity	 4 UHF 487-694 MHz FM -90 dBm
Data Control Channel Number Channel Modulation Methode Receiving Sensitivity Transmisssion consumption	 10 FSK -90 dBm ≤ +7 dBm
Number of connectable Chairman/Delegate Units	40 units
LED Indicator	Power Switch (Green) Control Button (Green)
Finish	Front Panel: Steel Plate, Black, Paint Case: Steel Plate, Black, Paint
Dimensions	483 (W) x 44.9 (H) x 266 (D) mm
Weight	3.1 kg
Accessories	AC/DC Adapter ....1, TNC Antenna ....1, BNC Antenna ....2 Male to Male Phone Jack 6.3 mm Adapter 1

UNIT: mm SCALE: 1/3

JUL/28/2026

TOA Corporation


DWG No: 506426014

WIRELESS CONFERENCE SYSTEM (CENTRAL UNIT)


Z-TS500-AS

APPEARANCE


Front View

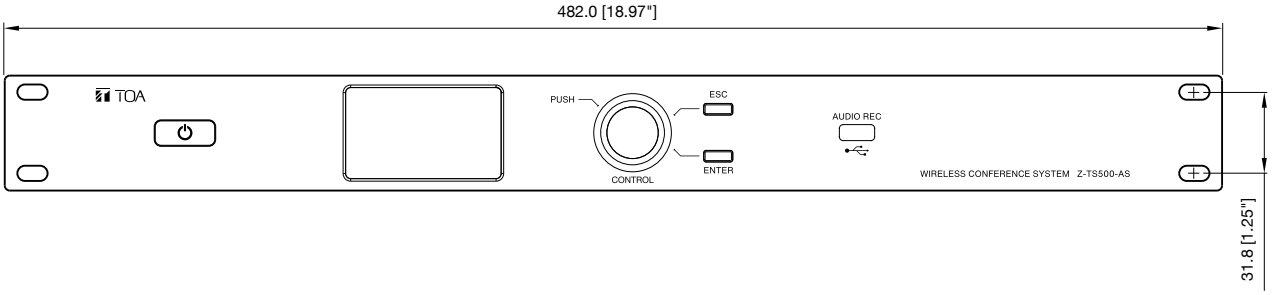

Rear View

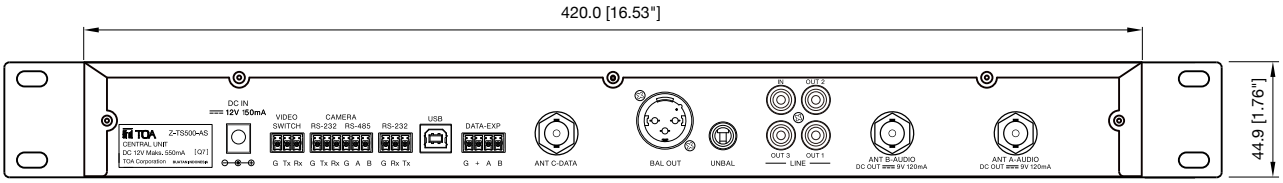

Side View

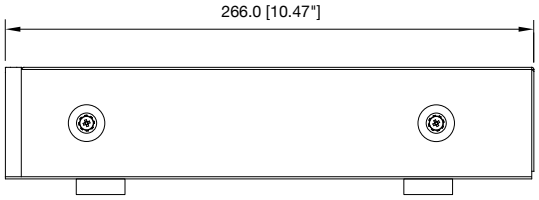

UNIT: mm SCALE: 1/3

JUL/28/2026

TOA Corporation

DWG No: 506426014